

KVM Extender

Remote Console Access at your Fingertips

Extend your
control to

300m




Extra
PC Port



Diagram

Remote

Local

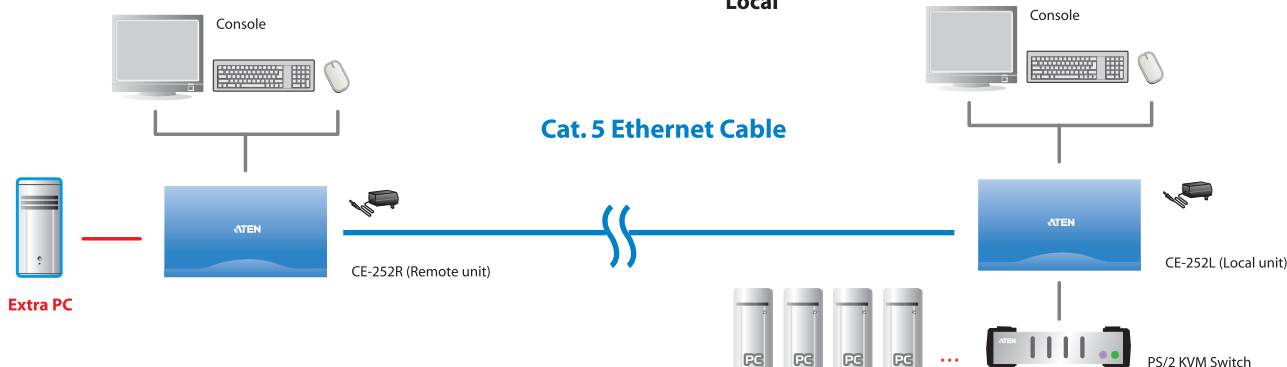

Model: **CE-252**

Features

- Local and Remote Units connect at distances up to 300m using Cat.5 UTP cable
- Dual Console Operation - Control system from both local and remote consoles
- Additional PC connection allowed for the remote unit
- Supports DDC2B for local monitor
- Built in ASIC chip for greater reliability and compatibility
- PS/2 and Microsoft Intellimouse Support
- Push button selection – sequential selection between local and auto mode
- Hotkey operation- switching between PCs
- Two gain control modes provided for the sharpest video quality –manual or automatic
- Adjustable gain control – manually adjusts signal strength to compensate for distance
- Automatic gain control – automatically adjusts signal strength to compensate for distance
- High resolution video – up to 2048x1536 (for the local computer)

Specifications

Function	CE-252L	CE-252R
Computer Connection	1	1
Connectors	Console	1 x mini din 6 female (purple)
		1 x HDB-15 female (blue)
		1 x mini din 6 female (green)
	Computer	1 x SPHD-15 female (yellow)
		1 x RJ-45 socket
		1 x DC 5.3V Jack
Button	Port Selection	1 x push button
Switch	Auto / Manual Gain	-
	Hotkey Selection	1 x 2-way slide switch
Knob	Video Gain Control	-
		1 x 2-way slide switch
LEDs		1 x Local (green)
		1 x Remote (green)
Keyboard/Mouse Emulation		PS/2
Resolution/Category 5 UTP Cable		1600x1200 @ 500 feet
Extension Distance		1024x768 @ 1000 feet
Operating System Requirements		Dos 6.2+; Win95 or newer; Linux: Redhed 6.0 or newer, Mandrake 9.0 or newer, SUSE 8.2 or newer; FreeBSD 3.51 or newer; Netware 5.0 or newer; OS/2, AIX 4.3 or newer
Power Consumption		DC 5.3V 2.6W
Operation Temperature		0~50°C(0~80% RH, Non-condensing)
Storage Temperature		-20°C~60°C(0~80% RH, Non-condensing)
Housing		Metal
Weight		400 g
Dimensions		139x81x34mm