



**Universal A/V to HDMI Switch with Scaler
VC1080
User Manual**



www.aten.com

EMC Information

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

CE Warning:

This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

RoHS

This product is RoHS compliant.

SJ/T 11364-2006

The following contains information that relates to China.

部件名称	有毒有害物质或元素					
	铅	汞	镉	六价铬	多溴联苯	多溴二苯醚
电器部件	●	○	○	○	○	○
机构部件	○	○	○	○	○	○

- : 表示该有毒有害物质在该部件所有均质材料中的含量均在SJ/T 11363-2006规定的限量要求之下。
- : 表示符合欧盟的豁免条款, 但该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T 11363-2006的限量要求。
- ×: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T 11363-2006的限量要求。



User Information

Online Registration

Be sure to register your product at our online support center:

International	http://eservice.aten.com
---------------	---

Telephone Support

For telephone support, call this number:

International	886-2-8692-6959
China	86-10-5255-0110
Japan	81-3-5615-5811
Korea	82-2-467-6789
North America	1-888-999-ATEN ext 4988
United Kingdom	44-8-4481-58923

User Notice

All information, documentation, and specifications contained in this manual are subject to change without prior notification by the manufacturer. The manufacturer makes no representations or warranties, either expressed or implied, with respect to the contents hereof and specifically disclaims any warranties as to merchantability or fitness for any particular purpose. Any of the manufacturer's software described in this manual is sold or licensed *as is*. Should the programs prove defective following their purchase, the buyer (and not the manufacturer, its distributor, or its dealer), assumes the entire cost of all necessary servicing, repair and any incidental or consequential damages resulting from any defect in the software.

The manufacturer of this system is not responsible for any radio and/or TV interference caused by unauthorized modifications to this device. It is the responsibility of the user to correct such interference.

The manufacturer is not responsible for any damage incurred in the operation of this system if the correct operational voltage setting was not selected prior to operation. **PLEASE VERIFY THAT THE VOLTAGE SETTING IS CORRECT BEFORE USE.**

Package Contents

The VC1080 Universal A/V to HDMI Switch with Scaler package consists of:

- ◆ 1 VC1080 Universal A/V to HDMI Switch with Scaler
- ◆ 1 IR Remote Control Unit
- ◆ 1 IR Extension Cable
- ◆ 1 Power Adapter
- ◆ 1 User Instructions*
- ◆ 1 Foot Pad Set (4 pieces)

Check to make sure that all the components are present and that nothing got damaged in shipping. If you encounter a problem, contact your dealer.

Read this manual thoroughly and follow the installation and operation procedures carefully to prevent any damage to the unit, and/or any of the devices connected to it.

* Features may have been added to the VC1080 since this manual was printed. Please visit our website to download the most up-to-date version.

© Copyright 2012–2014 ATEN® International Co., Ltd.
Manual Date: 2014-03-21

ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd. All rights reserved.
All other brand names and trademarks are the registered property of their respective owners.

Contents

FCC Information	ii
SJ/T 11364-2006.	ii
User Information	iii
Online Registration	iii
Telephone Support	iii
User Notice	iii
Package Contents.	iv
Contents	v
About this Manual	vii
Conventions	viii
Product Information.	viii
1. Introduction	
Overview	1
Features	2
Requirements	3
Source Devices(s).	3
Display Device.	3
Cables	3
Components	4
Front View	4
Rear View	5
IR Remote Control.	6
2. Hardware Setup	
Grounding	9
Installation.	10
Installing the RS-232 Controller	11
3. Operation	
Overview	13
Manual Selection.	13
Remote Control Selection	13
OSD Menu	14
OSD Operation	15
Video Setting.	15
Audio Setting.	17
System Setting	18
Information	19
RS-232 Serial Interface.	20
Configuring the Serial Port	20
Switch Port Commands	20
Mute Commands	22
Read Commands	23
Verification.	23

Powering Off and Restarting. 23

Appendix

Safety Instructions 25
 General 25
Technical Support. 27
 International 27
 North America 27
Specifications 28
 Supported Resolutions 29
 29
Limited Warranty. 30

About this Manual

This User Manual is provided to help you get the most from your VC1080 system. It covers all aspects of installation, configuration and operation. An overview of the information found in the manual is provided below.

Introduction, introduces you to the VC1080 system. Its purpose, features and benefits are presented, and its front and back panel components are described.

Hardware Setup, describes how to set up your VC1080 installation. The necessary steps are provided.

Operation, explains the fundamental concepts involved in operating the VC1080 via the front panel pushbuttons, remote controlled On-Screen Display (OSD), or through the RS-232 serial interface.

An Appendix, provides specifications and other technical information regarding the VC1080.

Conventions

This manual uses the following conventions:

- Monospaced Indicates text that you should key in.
- [] Indicates keys you should press. For example, [Enter] means to press the **Enter** key. If keys need to be chorded, they appear together in the same bracket with a plus sign between them: [Ctrl+Alt].
1. Numbered lists represent procedures with sequential steps.
- ◆ Bullet lists provide information, but do not involve sequential steps.
- Indicates selecting the option (on a menu or dialog box, for example), that comes next. For example, Start → Run means to open the *Start* menu, and then select *Run*.
-  Indicates critical information.

Product Information

For information about all ATEN products and how they can help you connect without limits, visit ATEN on the Web or contact an ATEN Authorized Reseller. Visit ATEN on the Web for a list of locations and telephone numbers:

International	http://www.aten.com
North America	http://www.aten-usa.com

Chapter 1

Introduction

Overview

Multimedia devices flooding today's market utilize a wide range of formats and resolutions, such that video display compatibility becomes an issue. The VC1080 Universal A/V to HDMI Switch with Scaler offers an easy and convenient way of converting multiple analog/digital audio/video input signals into HDMI output. Enjoy a range of video formats, including composite, component, S-video, VGA, and HDMI with one HDMI display.

Setting up the VC1080 is quick and simple, with no software installation required. You can operate the VC1080 through accessible front panel pushbuttons, using an infrared (IR) remote control, or via the built-in On-Screen Display (OSD). Front panel LEDs indicate which port is in use and you can quickly toggle between A/V sources without the hassle of disconnecting cables or switching off equipment. The VC1080 supports a distance of up to 15 meters (VC1080 to HDMI display).

The VC1080 carries a high-performing scaling engine that converts the video resolution to give you the best image quality. It is equipped with a next generation color engine that automatically adjusts and enhances picture quality. It features a superior 3D de-interlacer function for smooth video playback. The VC1080 uses Smart Video Display technology to match the display's native resolution, as well as ATEN's Video DynaSync, which optimizes the video display without any delay when switching devices. The VC1080 also integrates superior video noise reduction and comb filter for maximum viewing comfort.

Supported input resolutions include PC resolutions VVGA, SVGA, XGA, SXGA and up to UXGA; and HDTV resolutions up to 1080p. It supports analog and digital audio outputs, as well as one stereo audio output. A built-in bidirectional RS-232 controller makes the VC1080 easy to integrate into control system applications, and configure its settings.

With the VC1080 Universal A/V to HDMI Switch with Scaler, you can get the most out of your HDMI display without the hassle and cost of connecting multiple converters and cables.

Features

- ◆ Converts multiple analog/digital audio/video signals to HDMI output
- ◆ Features a built in high-performance scaler function for best image quality
- ◆ Integrated next generation color engine – automatic picture quality/color adjustment and enhancement
- ◆ Features a superior 3D de-interlacer function for smooth video playback quality (frame buffer 3D motion adaptive video)
- ◆ Supports Smart Video Display technology to match the native resolution of the display for optimized video quality
- ◆ Supports Video DynaSync™ – an exclusive ATEN technology that eliminates boot-up display problems and optimizes resolution when switching between ports
- ◆ Integrated superior video noise reduction
- ◆ Supports comb filter – provides superior chrominance and luminance separation function for composite video signal
- ◆ Multi-resolution input of 480i, 480p, 576i, 576p, 720p, 1080i and 1080p (1920 x 1080); VGA, SVGA, XGA, SXGA and up to UXGA
- ◆ Manual selection of output resolution via built-in scaler function - includes the display's native resolution and common video resolutions 1080p, 720p, 1600 x 1200, 1280 x 1024 and 1024 x 768
- ◆ Features auto switching to the next available video input source
- ◆ Supports optical/coaxial digital audio and one stereo audio output
- ◆ RS-232 command control for switching ports and system configuration
- ◆ Device selection via front panel pushbuttons, IR remote control, and RS-232 control signal
- ◆ Built-in OSD function for video, audio and system settings configuration
- ◆ Supports IR extension using a receiver extension cable
- ◆ HDMI and HDCP compatible
- ◆ Extends HDMI output distance up to 15m (24AWG)

Requirements

The following equipment is required for a complete VC1080 installation:

Source Devices(s)

The source device can be any of the following:

- ◆ A/V composite audio/video device and RCA connectors
- ◆ Component video and audio with RCA connectors
- ◆ S-Video device and connector
- ◆ VGA device and HDB-15 connector with 3.5mm audio connector
- ◆ HDMI Type A connector(s)

Display Device

- ◆ HDMI display device or receiver with an HDMI Type A input connector

Cables


- ◆ IR extension cable (included in the package)
- ◆ RS-232 cable

Note: If you wish to utilize the VC1080's high-end serial controller function, you will also need to purchase an appropriate RS-232 cable. See *Installing the RS-232 Controller*, page 11.

- ◆ RCA video/audio cable
- ◆ S-video cable
- ◆ HDMI cable
- ◆ VGA audio cable


Components

Front View

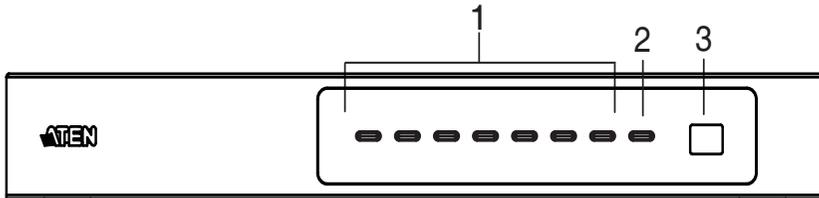


No.	Component	Description
1	Port LEDs / Pushbuttons	The SELECTED port's LED (green) lights up to indicate that the port is selected. Pressing a port selection pushbutton routes the video source from the corresponding input port to the display.
2	HDMI Mute	The LED (blue) lights up to indicate audio mute for the output HDMI signal
3	IR Receiver	This receives signals from the IR remote control.

Rear View

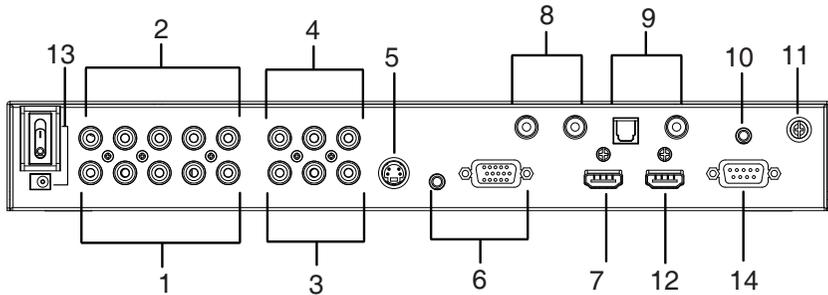

No.	Component	Description
1	Comp1 In	Connect your component video source device to these ports.
2	Comp2 In	
3	A/V1 In	Connect your composite video source device to these ports.
4	A/V2 In	
5	S-Video In	Connect your S-Video source device to this port.
6	VGA In	Connect your VGA source device to this port.
7	HDMI In	Connect your HDMI source device to this port.
8	Stereo Audio Ports	The red port is for the right audio channel, and the white port is for the left audio channel.
9	Digital Audio Ports	Connect the optical and coaxial audio cables to these ports.
10	IR Extender Port	Connect the IR Extender to this port. Note: The additional IR receiver can be purchased separately.
11	Grounding Terminal	The grounding wire (used to ground the unit) attaches here. Note: The grounding wire is not included in this package. Contact your dealer for more information.
12	HDMI Out	Connect your HDMI display to this port.
13	Power Switch / Power Jack	Plug in the power adapter to the power jack and use the switch to power on the VC1080.
14	RS-232 Serial Port	This is the serial remote port for input source selection and high-end system control, including firmware upgrade.

IR Remote Control

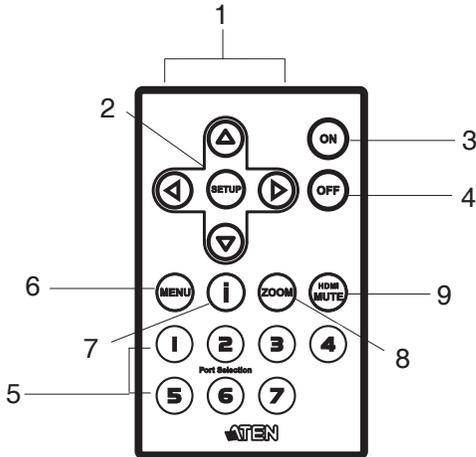

No.	Component	Description
1	Up / Down / Left / Right Buttons	<p>Press the <i>Up / Down / Left / Right</i> buttons to cycle through the OSD menu and view/select menu options, as follows:</p> <ul style="list-style-type: none"> ◆ Press the <i>Up / Down</i> buttons to cycle through the menu/submenu selections. <p>When used in conjunction with the Info button, use these buttons to cycle through the available Output Resolutions for the display (see page 7).</p> <ul style="list-style-type: none"> ◆ Press the <i>Right</i> button to go the submenu. ◆ If you want to change or adjust a menu selection/option value, press the <i>Left or Right</i> button to go through all the selections/values. ◆ Press the <i>Left</i> button to go back to the previous menu/submenu. <p>Additionally, use the <i>Left / Right</i> buttons to adjust menu options that has a scale (i.e., 1 to 100).</p> <p>The <i>Left / Right</i> buttons are also Quick Function buttons for the Volume control. Press either the <i>Left or Right</i> button to display the Volume scale as follows:</p> 

No.	Component	Description
2	Setup	When cycling through the menu options and you want to change or adjust a selection/value, press this button. Press this again to confirm a selection.
3	On	Press this to power on the VC1080.
4	Off	Press this to power off the VC1080.
5	Port Selection Buttons 1~7	Press a button to switch to relative input port
6	Menu	Press this to enable / disable the OSD menu.
7	Info button	<p>Press this Quick Function button to display information about the source device on the upper left side of the screen. The information can include: Port number + Input type, Input resolution, Output resolution, Mute status. For example:</p> <p>Port 1 COMP1 In 720p Out 1920x1080</p>  <p>Note: The Output Resolution can be selected from the Info display. When the OSD appears on the upper left side of the screen, simply press the <i>Up / Down</i> button to cycle through the available options. It can also be selected via RS-232 commands (<i>Scaling Commands</i>, page 25).</p>
8	Zoom	<p>Press this Quick Function button to scale to full screen or use other screen zoom modes.</p> 
9	HDMI Mute	<p>Press this Quick Function button to enable / disable audio for the output HDMI port. See <i>Mute Commands</i>, page 22.</p> <p>Use the <i>Info</i> Quick Function button to determine the current mute status, which is displayed in the screen (see image above).</p>

This Page Intentionally Left Blank

Chapter 2

Hardware Setup



1. Important safety information regarding the placement of this device is provided on page 25. Please review it before proceeding.
2. Make sure that the power to all devices connected to the installation are turned off.
3. Make sure that all devices you will be installing are properly grounded.

Grounding

To prevent damage to your installation it is important that all devices are properly grounded.

1. Use a grounding wire to ground the VC1080 by connecting one end of the wire to the grounding terminal, and the other end of the wire to a suitable grounded object.
2. Make sure that the computer(s)/device(s) that the VC1080 connects to are properly grounded.

Note: The grounding wire is not included in the package. Please contact your dealer for the appropriate cable.


Installation

Installation of the VC1080 is simply a matter of plugging in the appropriate cables.

To install the VC1080, refer to the installation diagram below as you perform the following steps:

1. Use an HDMI cable to connect the HDMI input port on the video display device to the **HDMI Out** port on the rear of the VC1080.
2. Connect the source device(s) as follows:
 - a) Use RCA cables to connect the component source device(s) to the **Comp1 In** or **Comp2 In** ports on the VC1080.
 - b) Use RCA cables to connect the composite source device(s) to the **A/V1 In** or **A/V2 In** ports on the VC1080.
 - c) Use an S-video cable to connect the S-video source device(s) to the **S-Video In** port on the VC1080.
 - d) Use an HDB-15 cable and audio cable to connect the VGA source device(s) to the **VGA In** port on the VC1080.
 - e) Use HDMI cables to connect the HDMI output ports on the source device(s) to the **HDMI In** port on the VC1080.
3. Plug the provided power adapter into an appropriate AC power source; plug the power adapter cable into the Power Jack on the VC1080.
4. Connect your audio devices (such as speakers or AVRs) to the Stereo Audio Ports or Digital Audio Ports.
5. (Optional) To edit the VC1080 system settings through the RS-232 port, connect the hardware / software controller here.

6. (Optional) Connect the IR extender using the provided IR extension cable to this port.

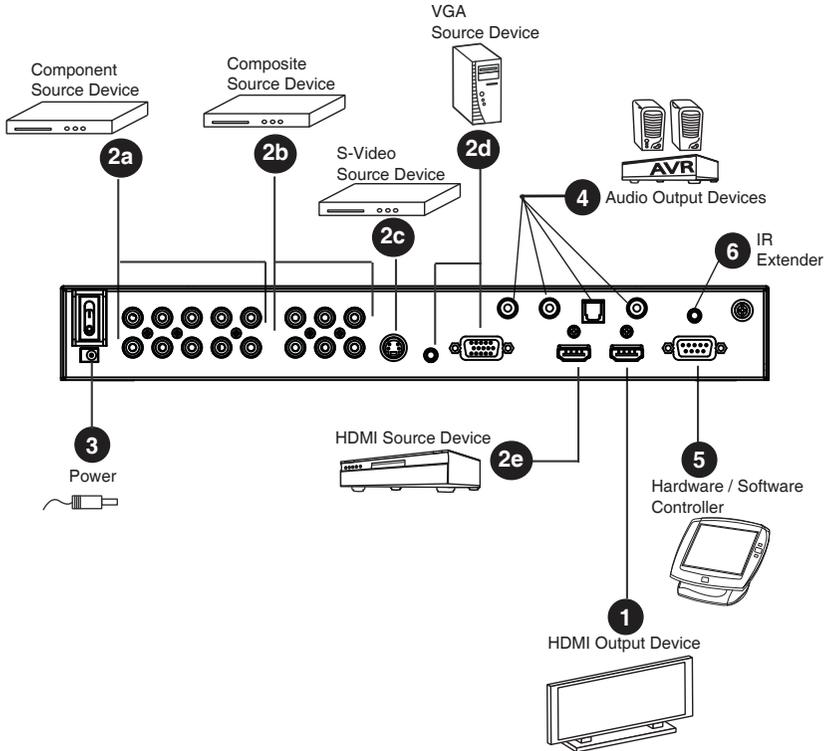

This completes the basic installation of the Universal A/V to HDMI Switch with Scaler. You may now power on the display and source devices.

Installing the RS-232 Controller

In order to use the RS-232 serial interface to attach a high-end controller (such as a PC) to the VC1080, use a serial cable such as a modem cable. The end connecting to the VC1080 should have a 9-pin male connector. Connect this to the serial interface on the rear of the VC1080. Refer to number **5** on the previous diagram.

Note: To configure the controller serial port, see page 20.

This Page Intentionally Left Blank

Chapter 3

Operation

Overview

The Universal A/V to HDMI Switch with Scaler offers easy and flexible source device selection with either the front panel pushbuttons, with the remote control, or through the RS-232 serial interface.

Manual Selection

To select a source device, press the pushbutton that corresponds to the port to which it is connected.

Note: The Port LED (green) light indicates which port is currently selected.

Remote Control Selection

To select a source device with the remote control, press the number button that corresponds to the port to which it is connected.

Note: Aim the remote control unit at the IR receiver located on the front panel of the VC1080. For optimum performance, make sure there is a clear line-of-sight between the remote control unit and the IR receiver.

OSD Menu

Use the **MENU** pushbutton on the remote control to view the OSD menu and cycle through the options in the order shown in the table below. The highlighted texts indicate the VC1080's default setting.

Menu Page	Sub-Menu Page(s)			
Input Setting 	Picture	Standard / Vivid / Cinema / Sports / Game / Custom (Note: This option is for non-VGA video input devices only.)		
	Brightness	0~100 (standard=50)		
	Contrast	0~100 (standard=50)		
	Tint	0~100 (standard=50) (Note: This option is for non-VGA video input devices only.)		
	Color	0~100 (standard=50) (Note: This option is for non-VGA video input devices only.)		
	Sharpness	0~100 (standard=50)		
	Color Temp	Standard / Warm / Cold / Custom	Red	0~100 (standard=50)
			Green	0~100 (standard=50)
			Blue	0~100 (standard=50)
	Aspect	Full Screen / 16:9 / Overscan / 4:3		
(For VGA video input device) Full Screen / 4:3				
VGA mode (For VGA video input device only)	Auto		On / Off	
	H position		0~100 (standard=50)	
	V position		0~100 (standard=50)	
Audio Setting 	Sound	Off / Pop / Rock / Custom		
	Volume	0~100 (standard=50)		
	Bass	0~100 (standard=50)		
	Treble	0~100 (standard=50)		
	Balance	0~100 (standard=50)		
System Setting 	Language	English / Traditional Chinese / Simplified Chinese		
	OSD	Timer	5 sec / 10 sec / 15 sec / ... / 60 sec	
		Message	On / Off	
	Sleep Timer	Off / 10 sec / 20 sec / ... / 120 sec		
	Output Res	Native / 1024x768 / 1280x1024 / 1600x1200 / 720p / 1080p		
	HDMI Mute	On / Off		
	Reset	On / Off		
Information 	Input	Input Resolution		
	Output	Output Resolution		
	Version	Version Number		



OSD Operation

Use the remote control to operate the OSD menu. Refer to the *IR Remote Control*, page 6 for details on how to use the remote control buttons to cycle through the OSD menu, go to submenus, change/adjust the options and make a selection.


Video Setting

Use the following screens to adjust the display's video settings. The video settings vary when using a VGA input device.

(For non-VGA video input devices)

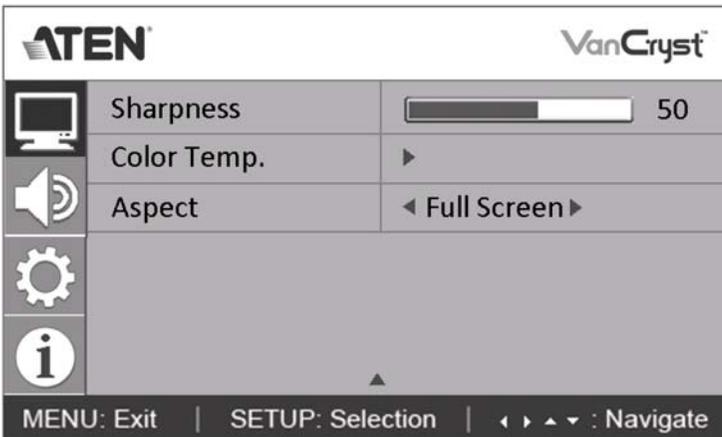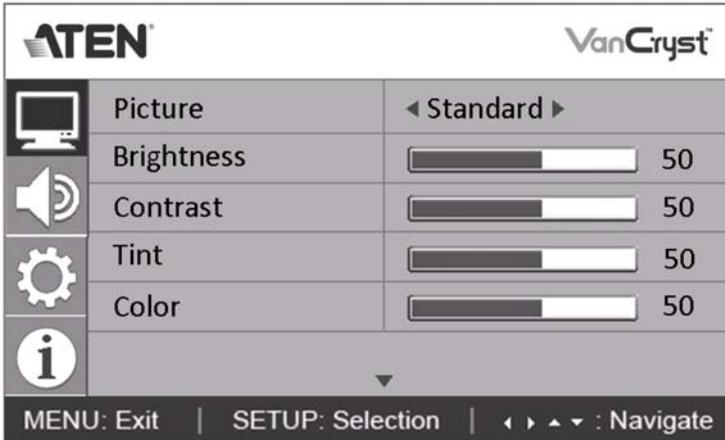

(VGA video input device)

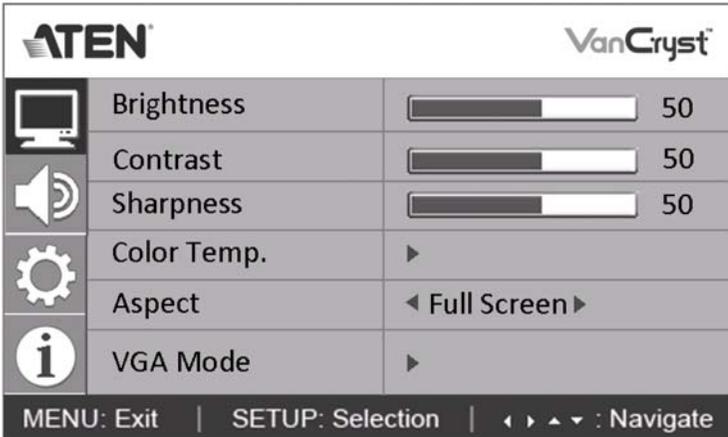

1. When using a non-VGA video input device, select a preset **Picture** mode (Standard, Vivid, Cinema, Sports, Game), or choose **Custom** to manually configure the video display. If you selected **Custom**, use the scale (1 ~ 100) to set the display settings in the next step.
2. Use the scale (1 ~ 100) to set the following display settings
 - ◆ Brightness
 - ◆ Contrast
 - ◆ Sharpness
 - ◆ Tint
 - ◆ Color
3. To configure the **Color Temp** settings, select the preset color temperature mode you prefer (**Standard**, **Warm** or **Cold**) or use your own color temperature settings by selecting **Custom**.

If you selected **Custom**, use the scales (1 ~ 100) to configure the RGB color gain settings as follows:


- ◆ Red
- ◆ Green
- ◆ Blue

Note: The RGB color gain settings cannot be configured if you have selected a preset color temperature.

4. Select the aspect ratio setting that you want to use. The available options vary when using a VGA input device. Choices are as follows:
 - ◆ Full Screen - view the video in the default aspect ratio of the display
 - ◆ 16:9 - this is a common aspect ratio used by TVs and monitors
 - ◆ Overscan - view the video at a maximized ratio that fills the display; may stretch or expand the picture, thus cutting off some images
 - ◆ 4:3 - this is a common aspect ratio used by TVs and monitors
5. (VGA video input device only) Select **Auto** to have the screen position automatically adjusted. Use the **H-Position** and **V-Position** scales (1 ~ 100) to set the horizontal and vertical positions of the screen.

Audio Setting

Use this screen to configure the VC1080 audio settings.

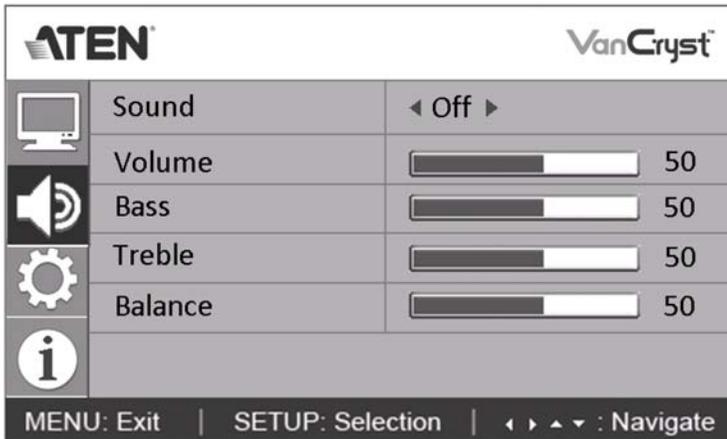


1. To configure the sound settings, select the preset **Sound** mode you prefer (**Off**, **Pop** or **Rock**) or use your own sound settings by selecting **Custom**. If you selected **Custom**, use the scales (1 ~ 100) to configure the following:
 - ◆ Bass
 - ◆ Treble
 - ◆ Balance

Note: These settings cannot be configured if you have selected a preset sound mode.

2. Set the **Volume** according to your preference.
-

System Setting

Use this screen to configure the VC1080 other settings.

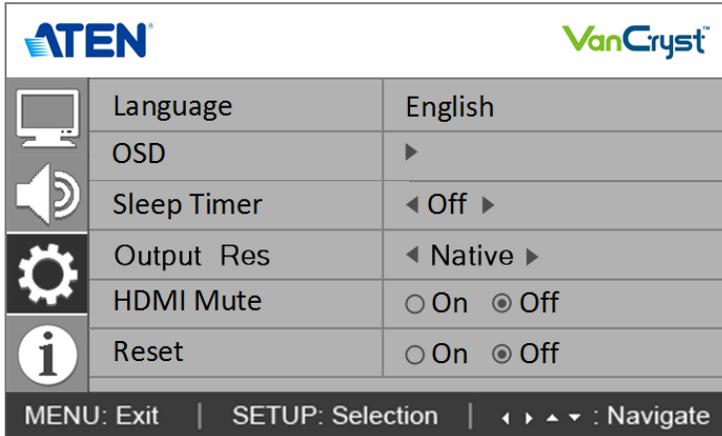

1. Select the language that the OSD menu uses.
2. The **OSD** menu allows you to configure the following settings.
 - ◆ **Timer.** This is how long the OSD menu is displayed before being hidden.
 - ◆ **Message.** Select **On** to show enable the OSD to display alert messages. Otherwise choose **Off**.
3. When the VC1080 is not in use, set how long (10 ~ 120 minutes) it waits before it goes into sleep mode. You can select the **Sleep Timer** to **Off** to disable this function.

Note: If a front panel button is pressed, or an IR / RS-232 command is received at more than 30 seconds before sleep, the VC1080 executes the command but the Sleep Timer function continues. If a command is received less than 30 seconds before sleep, the Sleep Timer is cancelled altogether.

4. Select the **Output Resolution** you want to use for the display.
5. Set the sound to mute by selecting **On**, otherwise set this to **Off**.

Note: You can use the IR remote control to configure the **Mute** function. See *IR Remote Control*, page 6, for details.

6. **Reset.** You can reset the VC1080 OSD settings to the default values at the next startup by selecting **Yes**. To keep using the last saved settings, set this to **No**.

Information

This screen shows the resolution details of your input and output displays, as well as the firmware version of the VC1080.

		
	Input	1280 X 1024
	Output	1080 P
	Version	V1.0.066
		
		
MENU: Exit SETUP: Selection ◀ ▶ ▲ ▼ : Navigate		

1. The **Input** Resolution refers to your input source device's displays settings.
2. The **Output** Resolution refers to the HDMI displays resolution.

Note: See *Supported Resolutions*, page 29 to view supported VGA and HDMI resolutions.

3. **Version** show the firmware version of the VC1080.

You can use the IR remote control to display this screen. See *IR Remote Control*, page 6, for details.

RS-232 Serial Interface

The VC1080's built-in bi-directional RS-232 serial interface allows system control through a high-end controller, such as a PC and/or home automation/home theater software package.

Configuring the Serial Port

The controller's serial port should be configured as follows:

Baud Rate	19200
Data Bits	8
Parity	None
Stop Bits	1
Flow Control	None

Switch Port Commands

The formula for Switch commands is as follows:

Switch Command + Input Command + Port number [Enter]

1. For example, to switch input port to port 02, type the following:
sw i02 [Enter]
2. To switch to the next port, input the following:
sw + [Enter]

The following tables show the possible values and formats for the **Input** command, **Port Number** and **Control**:

Command	Description
sw	Switch command

Input Command	Description
i	Input command

Port number	Description
xx	01-07 port (default is 01)

Control	Description
on	Turn on the VC1080
off	Turn off the VC1080
+	Next Port
-	Previous Port

Note: 1. Each command string can be separated with a space.

2. The **Port Number** command string can be skipped, and the default value will be used.

The following table shows the available command list:

Command	Input	Port	Control	Enter	Description
sw	i	xx		[Enter]	Switch Input Port
sw			on	[Enter]	Turn on (Display out)
			off	[Enter]	Turn off (No output)
sw			+	[Enter]	Switch to the next input
			-	[Enter]	Switch to the previous input

Mute Commands

Enable or disable audio coming from the output HDMI port using the following command:

Mute Command + Control [Enter]

The following tables show the possible values and formats for the **Control** command:

Command	Description
mute	Enable / Disable audio of HDMI output port

Control	Description
on	Mute on; audio from HDMI output port is disabled
off	Mute off; audio output enabled (default)

Note: Each command string can be separated with a space.

The following table shows the available command list:

Command	Control	Enter	Description
mute	on	[Enter]	Mute on (no audio)
mute	off	[Enter]	Mute off (audio out)

Read Commands

View information from the device using the following command:

Read Command + Control [Enter]

The following tables show the possible values and formats for the **Control** command:

Command	Description
read	Reads and displays information from the VC1080

Control	Description
version	Displays the firmware version of the VC1080

Note: Each command string can be separated with a space.

The following table shows the available command list:

Command	Control	Enter	Description
read	version	[Enter]	Displays firmware version

Switch Mode

The Switch Mode Go To function enables the VC1080 to switch to the next port with a powered on source device when the current input source is off.

In addition, if a port is removed or the transmission signal from the port to the VC1080 is interrupted, the VC1080 automatically switches to a port that has an input signal.

The default setting for the Go To command is **Off**.

The formula for the Switch Mode command is as follows:

Switch Command + Control + [Enter]

To enable the Go To function, type the following:

swmode goto on [Enter]

The following table shows the available command list:

Command	Control	Enter	Description
swmode	goto on	[Enter]	Enables Go To function
	goto off		Disables Go To function (default)

Scaling Commands

You can select the output resolution that you want the display device to use. This is set to the display's native resolution by default.

The formula for the Scaling command is as follows:

Scaling Command + Control [Enter]

For example, to select 1024 x 768 as your display's resolution, type the following:

scaling 1024 [enter]

The following tables show the possible values and formats for the **Control** command:

Command	Description
scaling	Sets the display's output resolution

Control	Description
native	Use the display's native resolution (default) <ul style="list-style-type: none"> ◆ If the VC1080 is using HDMI Mode, the default native resolution is 720p. ◆ If the VC1080 is using DVI Mode, the default native resolution is 1024 x 768. You can set the Mode via the <i>Format Commands</i> , page 26.
1080p	Use 1920 x 1080 display resolution
720p	Use 1280 x 720 display resolution
1600	Use 1600 x 1200 display resolution
1280	Use 1280 x 1024 display resolution
1024	Use 1024 x 768 display resolution

The following table shows the available command list:

Command	Control	Enter	Description
scaling	native / 1080p / 720p / 1600 / 1280 / 1024	[Enter]	Sets the display's output resolution

Format Commands

You can select the video format that you want the VC1080 to use. This is set to HDMI by default.

The formula for the Format command is as follows:

Format Command + Control [Enter]

For example, to select DVI as the video format, type the following:

format dvi [enter]

The default video format is HDMI.

The following tables show the possible values and formats for the **Control** command:

Command	Description
format	Sets the video format

Control	Description
hdmi	Use HDMI output video (default)
dvi	Use DVI output video

The following table shows the available command list:

Command	Control	Enter	Description
format	hdmi / dvi	[Enter]	Sets the video format

Verification

After entering a command, a verification message appears at the end of the command line as follows:

- ♦ **Command OK** - indicates that the command is correct and successfully performed by the VC1080.
- ♦ **Command incorrect** - indicates that the command has the wrong format and/or values.

Powering Off and Restarting

If you power off the VC1080, follows these steps before powering it on again:

1. Power off the attached devices.
2. Unplug the power adapter cable from the VC1080.
3. Wait 10 seconds, and then plug the power adapter cable back in.
4. After the VC1080 is powered on, power on the attached devices.

This Page Intentionally Left Blank

Safety Instructions

General

- ◆ Read all of these instructions. Save them for future reference.
- ◆ Follow all warnings and instructions marked on the device.
- ◆ Do not place the device on any unstable surface (cart, stand, table, etc.). If the device falls, serious damage will result.
- ◆ Do not use the device near water.
- ◆ Do not place the device near, or over, radiators or heat registers.
- ◆ The device cabinet is provided with slots and openings to allow for adequate ventilation. To ensure reliable operation, and to protect against overheating, these openings must never be blocked or covered.
- ◆ The device should never be placed on a soft surface (bed, sofa, rug, etc.) as this will block its ventilation openings. Likewise, the device should not be placed in a built in enclosure unless adequate ventilation has been provided.
- ◆ Never spill liquid of any kind on the device.
- ◆ Unplug the device from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- ◆ The device should be operated from the type of power source indicated on the marking label. If you are not sure of the type of power available, consult your dealer or local power company.
- ◆ The device is designed for IT power distribution systems with 230V phase-to-phase voltage.
- ◆ To prevent damage to your installation it is important that all devices are properly grounded.
- ◆ The device is equipped with a DC adapter. This is a safety feature.
- ◆ To help protect your system from sudden, transient increases and decreases in electrical power, use a surge suppressor, line conditioner, or un-interruptible power supply (UPS).
- ◆ Position system cables and power cables carefully; Be sure that nothing rests on any cables.

- ◆ Never push objects of any kind into or through cabinet slots. They may touch dangerous voltage points or short out parts resulting in a risk of fire or electrical shock.
- ◆ Do not attempt to service the device yourself. Refer all servicing to qualified service personnel.
- ◆ If the following conditions occur, unplug the device from the wall outlet and bring it to qualified service personnel for repair.
 - ◆ Liquid has been spilled into the device.
 - ◆ The device has been exposed to rain or water.
 - ◆ The device has been dropped, or the cabinet has been damaged.
 - ◆ The device exhibits a distinct change in performance, indicating a need for service.
 - ◆ The device does not operate normally when the operating instructions are followed.
- ◆ Only adjust those controls that are covered in the operating instructions. Improper adjustment of other controls may result in damage that will require extensive work by a qualified technician to repair.

Technical Support

International

- ◆ For online technical support – including troubleshooting, documentation, and software updates: <http://eservice.aten.com>
- ◆ For telephone support, see *Telephone Support*, page iii:

North America

Email Support		support@aten-usa.com
Online Technical Support	Troubleshooting Documentation Software Updates	http://www.aten-usa.com/support
Telephone Support		1-888-999-ATEN ext 4988

When you contact us, please have the following information ready beforehand:

- ◆ Product model number, serial number, and date of purchase.
- ◆ Your computer configuration, including operating system, revision level, expansion cards, and software.
- ◆ Any error messages displayed at the time the error occurred.
- ◆ The sequence of operations that led up to the error.
- ◆ Any other information you feel may be of help.

Specifications

Function					VC1080
Connectors	Input	AV 1/2	Component	Video	2 x RCA female (Blue) 2 x RCA female (Red) 2 x RCA female (Green)
				Audio	2 x RCA female (Red) 2 x RCA female (White)
		AV 3/4	Composite	Video	2 x RCA female (Yellow)
				Audio	2 x RCA female (Red) 2 x RCA female (White)
		AV 5	S Video	Video	1 x S Video female (Black)
				Audio	Share audio with AV3
	AV 6	VGA In	Video	1 x HDB-15 female (Blue)	
			Audio	1 x 3.5mm audio jack (Green)	
	AV 7	HDMI In		1 x HDMI Type A female (Black)	
	Output	Video	HDMI Out		1 x HDMI Type A female (Black)
		Digital	Optical Audio		1 x Toslink (Black)
			Coaxial Audio		1 x RCA female (Orange)
	Analog	Stereo Audio		2 x RCA female (White / Red)	
	RS-232 Port				1 x DB 9 female (Black)
Power Jack				1 x DC Jack	
IR Extender				1 x 3.5mm jack (Black)	
Switches	Source Switch			7 x Pushbuttons	
	HDMI Mute			1 x Pushbutton	
	Power			1 x Rocker	
LEDs	Selected			7 (Green)	
	HDMI Mute			1 (Blue)	
IR Control				1	
Video				Supports HDTV input resolutions: 480i, 480p, 576i, 576p, 720p, 1080i and 1080p; and PC input resolutions: VGA, SVGA, XGA, SXGA and up to UXGA	
Output Resolution				Automatically scales to native resolution of the display	
Power Consumption				DC 5.3V, 5.83W	

Function		VC1080
Environment	Operation Temperature	0 - 50°C
	Storage Temperature	-20°C - 60°C
	Humidity	0 – 80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	1.48 Kg
	Dimension (L x W x H)	33.50 x 16.13 x 4.40 cm

Supported Resolutions

VGA Port	HDMI Port
640 x 480 @60	640 x 480 @60
800 x 600 @60	800 x 600 @60
1024 x 768 @60	1024 x 768 @60
1152 x 864 @60	1152 x 864 @60
1280 x 720 @60	1280 x 720 @60
1280 x 768 @60	1280 x 768 @60
1280 x 800 @60	1280 x 960 @60
1280 x 960 @60	1280 x 1024 @60
1280 x 1024 @60	1360 x 768 @60
1360 x 768 @60	1400 x 1050 @60
1400 x 1050 @60	1440 x 900 @60
1440 x 900 @60	1600 x 1200 @60
1600 x 1200 @60	1680 x 1050 @60
1920 x 1080 @60	1920 x 1080 @60

Limited Warranty

IN NO EVENT SHALL THE DIRECT VENDOR'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, DISK, OR ITS DOCUMENTATION.

The direct vendor makes no warranty or representation, expressed, implied, or statutory with respect to the contents or use of this documentation, and especially disclaims its quality, performance, merchantability, or fitness for any particular purpose.

The direct vendor also reserves the right to revise or update the device or documentation without obligation to notify any individual or entity of such revisions, or update. For further inquiries, please contact your direct vendor.