


PS/2 Console Module

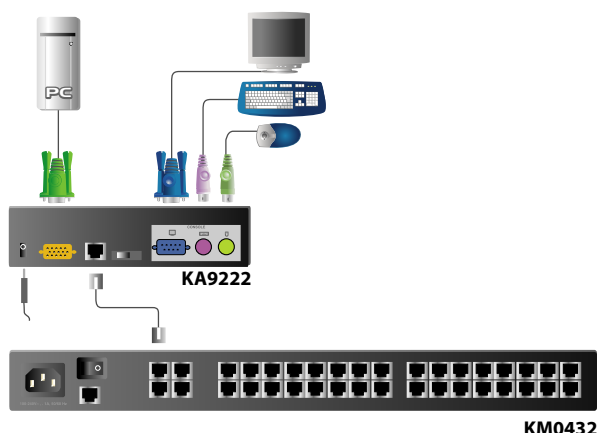

Specifications:

Console Connection	1
PC Selection	Push Button, Hotkeys, OSD
PC Connection	Direct
	To KM0216 / KM0432
Connectors	16 / 32
	Computer Side
	Console Side
	1 x SPHD-15 (F) Yellow
	1 x Mini-DIN-6 (F) Green
	1 x Mini-DIN-6 (F) Purple
	1 x HDB-15 (F) Blue
	Link
	1 x RJ-45 (F) Silver
	Power Port
	1 x DC Jack (F) Black
LEDs	Link
	1 x Green @ Front
	Local
	1 x Orange @ Front
	Remote
	1 x Orange @ Front
Button	Select
	1 x Temperately
Switch	Normal / Recover
	1 x Slide Switch
Power Consumption	DC 5V, 7W
Keyboard / Mouse Emulation	PS/2, Sun, USB (PC, Mac, SUN)
Scan Interval	1 ~ 255 secs.
Resolution	1024 x 768 @ 150M, DDC2B
Operation Temperature	0~ 50C
Storage Temperature	-20~ 60C
Humidity	0 ~ 80% RH, NC
Enclosure	Metal
Weight	730 g
Dimension	200 x 74.5 x 42 mm

Features:

- One PS/2 console module can control a local computer and a remote Matrix KVM Switch
- Toggle focus between your work PC and your KVM Switches / servers
- Built in ASIC for greater reliability and compatibility
Category 5 UTP Ethernet cable connects to the Matrix KVM Switch
- High resolution video - Up to 1024 x 768 @ 150 m (max.)