


master view™ max

Slideaway Console



Diagram

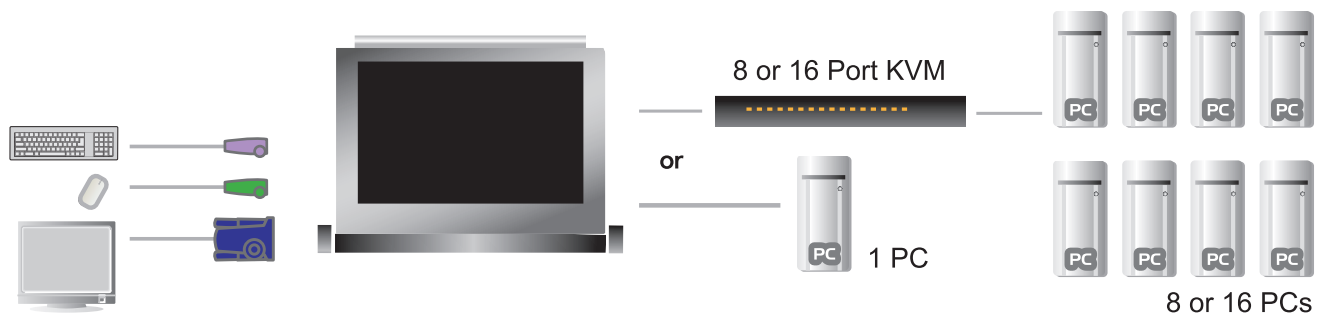

Model: CL-1200

Features

- Integrated KVM console featuring a 15" or 17" LCD monitor in Slideaway housing
- Dual consoles- simultaneous viewing and control or select one or the other via Hotkey
- Compatible with ATEN KVM Switches and servers
- Internal power built in
- Less than 1 U high mountable rack
- Adjustable depth to fit within the rack
- Improved design-Single person installation (Optional)

Specifications

Function	CL-1200	
Connectors	CPU Ports	1 x SPHD-15 F
	External Console	1 x 6 pin mini-DIN F (keyboard)
		1 x 6 pin mini-DIN F (mouse)
		1 x HDB-15 F (monitor)
Power	3 prong AC Socket	
	1 x Rocker (Power)	
Switches	4 x Buttons (LCD Module adjustment)	
	1 x Recessed (Reset)	
	1 x Power (Blue)	
LEDs	1 x Num Lock (Green)	
	1 x Caps Lock (Green)	
	1 x Scroll Lock (Green)	
	1 x Recessed (Reset)	
Video	15" LCD: 1024 x 768; DDC2B	
	17" LCD: 1280 x 1024; DDC2B	
KB/Mouse Emulation	PS/2	
Power Consumption	120V 60Hz 22.8W / 230V 50Hz 24W	
Environment	Operating Temperature: 0 - 50 °C Storage Temperature: -20 - 60 °C Humidity: 0 - 80% RH Noncondensing	
Housing	Metal	
Weight	15" LCD: 13.4kg / 17" LCD: 14.4kg	
Dimensions (L x W x H)	52.0 x 48.0 x 4.2 cm	

Rack Mounting Kit	Depth
Long (Optional)	68cm - 100cm
Short (Standard)	42cm - 72cm

Easy Installation Rack Mounting Kit	Depth
Long (Optional)	68cm - 105cm
Short (Optional)	42cm - 70cm